


PULLEYS


DIMENSIONS

DRIVEN PULLEY

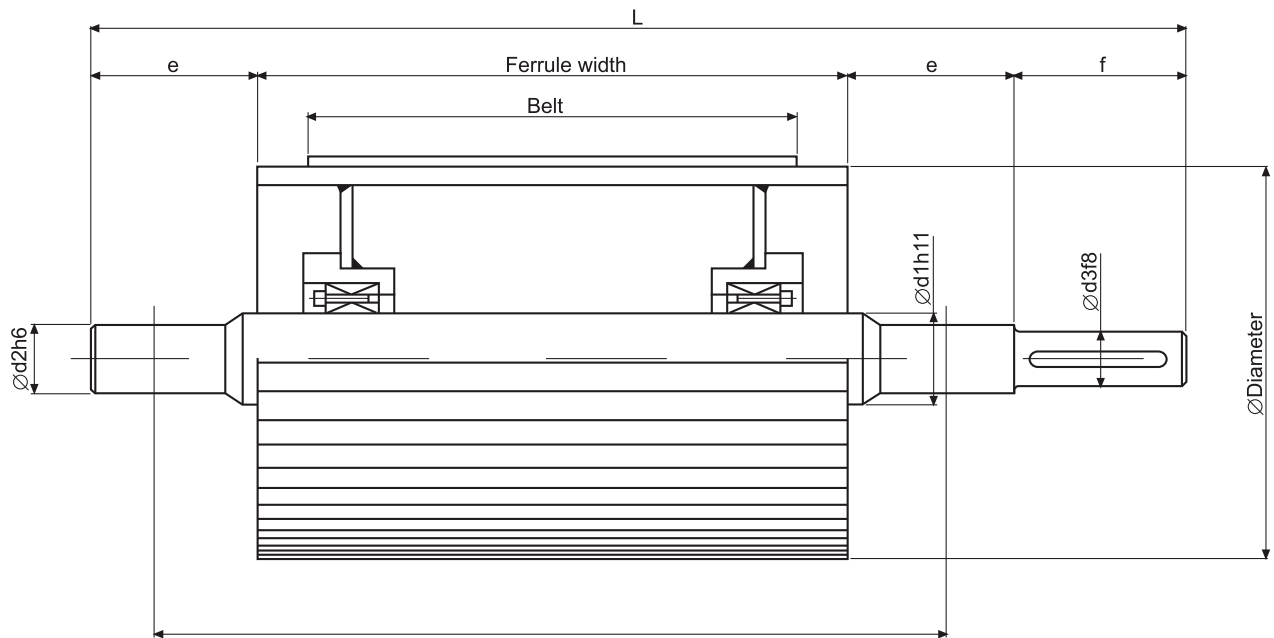


DRIVEN PULLEY

Clamp down distance

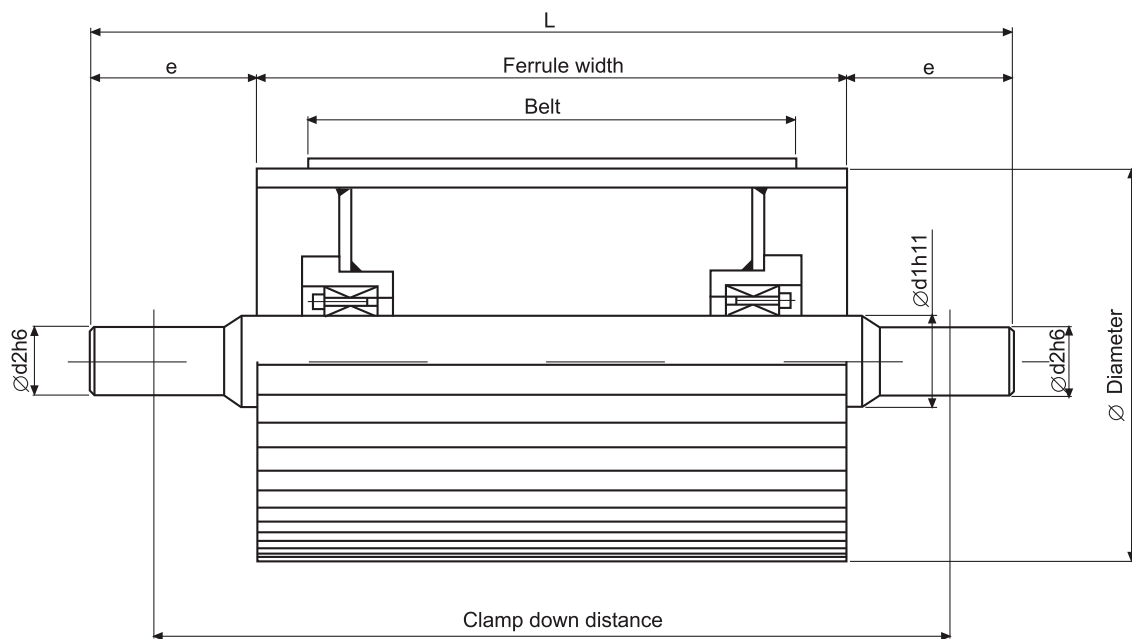


PULLEYS

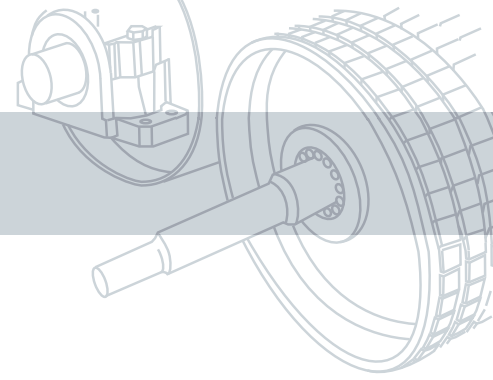

Belt	Shell width	Clamp down distance	f	e	L	Diameter	d1	d2	d3
400	500	675	60	100	795	315	50	40	35
			65	120	805	400	70	50	45
			80	150	835	500	90	65	60
500	600	775	65	120	905	315	70	50	45
			80	150	935	400	90	60	55
			90	160	955	500	110	80	75
650	750	950	65	120	1080	315	70	50	45
			80	150	1110	400	90	60	55
			90	160	1130	500	110	80	75
			110	190	1170	630	130	100	95
800	950	1150	65	120	1280	315	70	50	45
			80	150	1310	400	90	60	55
			90	160	1330	500	110	80	75
			110	190	1370	630	130	100	95
1000	1150	1350	120	230	1390	800	150	125	120
			65	120	1280	315	70	50	45
			80	150	1310	400	90	60	55
			90	160	1330	500	110	80	75
			110	190	1370	630	130	100	95
1200	1400	1650	120	230	1390	800	150	125	120
			140	270	1430	1000	190	160	155
			65	120	1280	315	70	50	45
			80	150	1310	400	90	60	55
			90	160	1330	500	110	80	75
			110	190	1370	630	130	100	95
1400	1600	1900	120	230	1390	800	150	125	120
			140	270	1430	1000	190	160	155
			180	300	1510	1000	190	160	155
			200	350	1550	1250	240	200	195
			80	150	1310	315	70	50	45
			90	160	1330	400	90	60	55
			110	190	1370	500	110	80	75
1600	1800	2200	120	230	1390	630	130	100	95
			140	270	1430	800	150	125	120
			180	300	1510	1000	190	160	155
			200	350	1550	1250	240	200	195
			80	150	1310	315	70	50	45
			90	160	1330	400	90	60	55
			110	190	1370	500	110	80	75
1800	2000	2450	120	230	1390	630	130	100	95
			140	270	1430	800	150	125	120
			180	300	1510	1000	190	160	155
			200	350	1550	1250	240	200	195
			260	460	1670	1400	350	300	295
			80	150	1310	315	70	50	45
			90	160	1330	400	90	60	55
2000	2200	2700	110	190	1370	500	110	80	75
			120	230	1390	630	130	100	95
			140	270	1430	800	150	125	120
			180	300	1510	1000	190	160	155
			200	350	1550	1250	240	200	195
			260	460	1670	1400	350	300	295
			80	150	1310	315	70	50	45
			90	160	1330	400	90	60	55
			110	190	1370	500	110	80	75
			120	230	1390	630	130	100	95
			140	270	1430	800	150	125	120
			180	300	1510	1000	190	160	155
			200	350	1550	1250	240	200	195
			260	460	1670	1400	350	300	295

Measurements in millimetres

PULLEYS

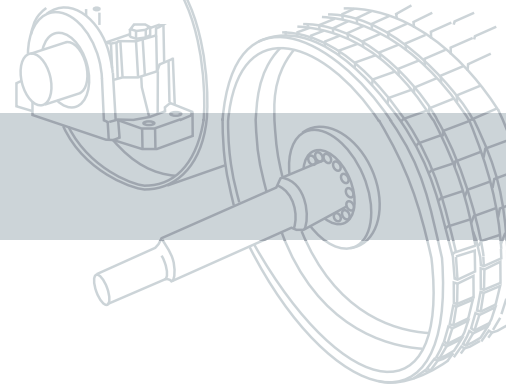

COATINGS

The coatings that we provide are: natural rubber, ceramic and polyurethane.

The rubberised finishes of natural rubber are: Chevron (in VI.), Diamond (Rhombic), Smooth and Custom order.

We glue the coatings using cold or hot methods.

Thicknesses range from 6 to 40 millimetres and hardnesses from 40 to 90 Shore A.

